



AF-2300

Fast drying with powerful fan.

AIRREX AF-2300 is the lowest ampere drawing axial air mover, while drawing 1.4amps, you can easily plug into a single 15 amp circuit. The other useful feature on AF-2300, is that you can use it in 4 different operating positions, drying all areas of a room. This is excellent for cleaning flooded building, water damaged spots. 1 year warranty.



AF-2300 is perfect solution with ADH-8000 in restoration against flood.

- Low noise
- 7blade
- Stackable
- Powerful air flow
- Robust design
- Light weight (25.4lbs)
- Socket on top
- Non-slip rubber
- Certification

ADH-8000


AF-2300



AF-2300 Specifications

ITEMS	Fan
Power Supply	115V~ 60Hz 1Ph
Current Consumption	HIGH: 1.4A / LOW: 1.13A
Fan Type	Axial Fan
Fan Blade	16 inch Dia. / 7 blade / Integral
Decibel	HIGH: 62.5dB / LOW: 54.2dB
Weight	25.4 lbs
Power Socket	Y
Air Flow	HIGH: 1,932CFM(54.7CMM) LOW: 1,417CFM(40.1CMM)
Dimesions (WxDxH)	20 x 22 x 15.7 inches
Case	Roto-mold housing
Certification	ETL/ CSA

• Stackable example

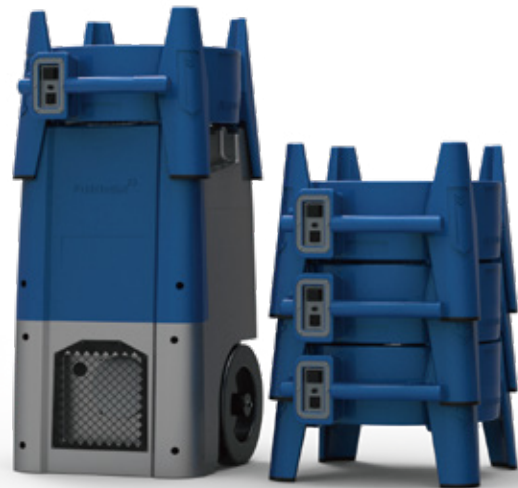

※ Designs and specifications of products are subject to change without prior notice for the improvements. The colors of products may be different due to the printing process.



Looking for an airmover that offers 4 different positions to help you tackle the most difficult drying challenges?
Looking for the most CFM per circuit of any airmover on the market? it's called the AF-2300.



- Very low ampere draw
- 4 position versatility for handling a wide range of applications
- Dry structures fast with 1932 actual CFM

- Turn or tilt on non-slip rubber foot to switch operating positions
- Compact design that's stackable for operation and storage
- Ideal for structural drying, carpet cleaning, ventilation

Airrex USA Office Mailing Address:

 2031 Exchange Parkway, Waco, TX 76712

 888-535-8841

 www.airrexusa.com

 sales@airrexusa.com